

# HV011



## »» Features

- High voltage DC load control.
- High performance power relay for xEV vehicle.
- Complies with RoHS-Directive 2011/65/EU.

## »» Type List

Terminal style	Contact form	Designation (provided with)	
		Flux tight	Flanged cover (Flux tight)
Plug-in terminal	1A (SPDM)	HV011-1AH-C	HV011-1AH-C1
PCB terminal		HV011P-1AH-C	-----

## »» Ordering Information

HV011  - 1A H - C   
 1 2 3 4 5 6

- |   |   |
|---|---|
| 1. HV011 -- Basic series designation              | 4. H -- Contact material Ag alloy   |
| 2. Blank -- Plug-in terminal<br>P -- PCB terminal | 5. C -- Flux tight<br>C1 -- Flanged cover (Flux tight)  |
| 3. 1A -- Form A, single-pole, double-make (SPDM)  | 6. <input type="checkbox"/> -- Coil voltage (please refer to the coil rating data for the availability) |

## »» Contact Rating

Rated load (Resistive)	10A 400VDC
------------------------	------------

## »» Coil Rating (DC)

Rated voltage (V)	Rated current ±10 % at 23°C (mA)	Coil resistance ±10 % at 23°C (Ω)	Pick up voltage (Max.) at 23°C	Drop out voltage (Min.) at 23°C	Max. continuous voltage at 23°C <sup>(1)</sup>	Power consumption at rated voltage
12	104	115	75 % of rated voltage	5 % of rated voltage	116 % of rated voltage	approx. 1.25W
24	52	460				

Notes : (1) Without continuous contact current.  
 (2) Coil terminal with polarity sensitivity, please follow the layout instruction.

## »» Specification


Contact material	Ag alloy	
Voltage drop <sup>(1)</sup>	Typ. 40mV at 10A	
Operate time <sup>(1)</sup>	30ms Max.	
Release time <sup>(1)</sup>	15ms Max.	
Insulation resistance <sup>(1)</sup>	100MΩ Min. (DC 500V)	
Dielectric strength <sup>(1)</sup>	Between open contact	: AC 2000V, 50/60Hz 1 min.
	Between contact and coil	: AC 2500V, 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~500Hz, 5.0G
	Damage limits	10~500Hz, 5.0G
Shock resistance	Operating extremes	10G
	Damage limits	100G

Life expectancy	Mechanical	500,000 ops. (frequency 9,000 ops./hr)	
	Electrical	Rated switching capacity (Resistive)	10A 400VDC: 100,000 ops. (frequency 180 ops./hr).
		Overload switching capacity	15A 400VDC: 50 ops.
		Short term carrying current	15A 10min., 30A 30sec.
Operating ambient temperature	-40~+85°C (no freezing)		
Weight	Approx. 65g, 70g (flanged cover)		


- Notes :
- (1) Initial value. Operate and release time excluding contact bounce.
  - (2) Coil and contact sides with polarities (+) and (-).
  - (3) Unless otherwise specified, all tests are under room temperature and humidity.
  - (4) Consider the heat of PCB is necessary, please check the actual condition of PCB.
  - (5) Applying no diode to this relay. The life expectancy will be lower when a diode is used. To use a varistor (ZNR) could absorb the coil surge of relay that is recommended.
  - (6) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.
  - (7) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.
  - (8) Take care to avoid cross connections as they may cause malfunctions or overheating.
  - (9) To avoid mounting the relay in strong magnetic fields (near a transformer or magnet) or close to an object that radiates heat.
  - (10) Do not switch the contacts without any load as the contact resistance may become increased rapidly.
  - (11) Use suitable harnesses and bus bars according to the current as below:  
10A type : Min. 2 mm<sup>2</sup>
  - (12) To avoid unexpected damage, when tightening a screw, use no exceeding specified torque range as below:  
M4 screw : 2.5 ~ 3 N.m
  - (13) Please contact Song Chuan for the detailed information.

## »» Outline Dimensions


### ◆ HV011 (-C cover type)

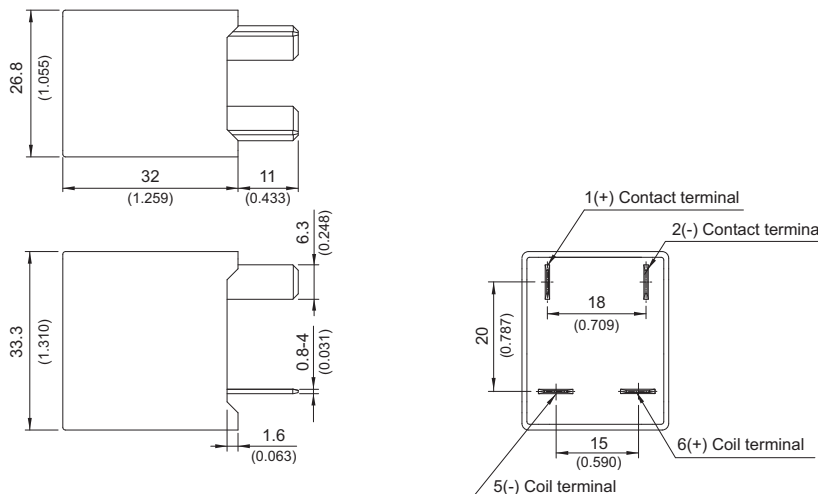

◆ HV011 (-C1 cover type)

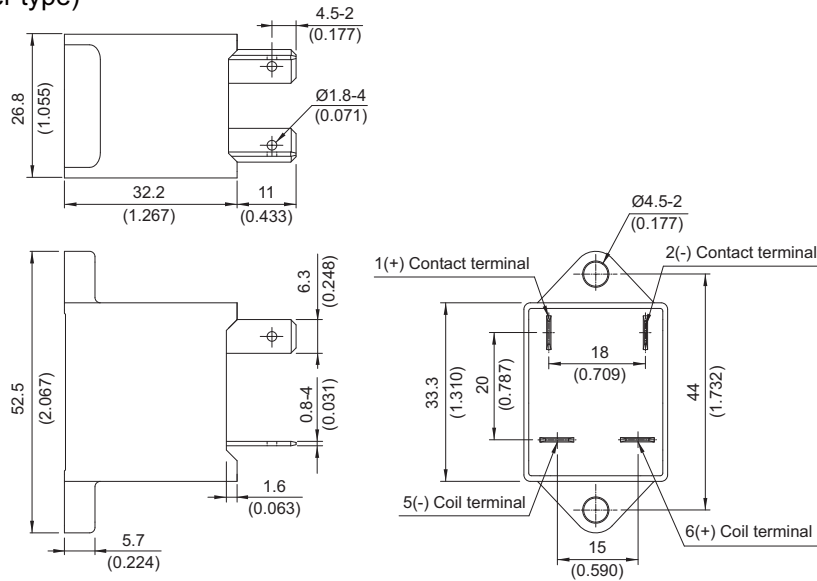


◆ HV011P (-C cover type)

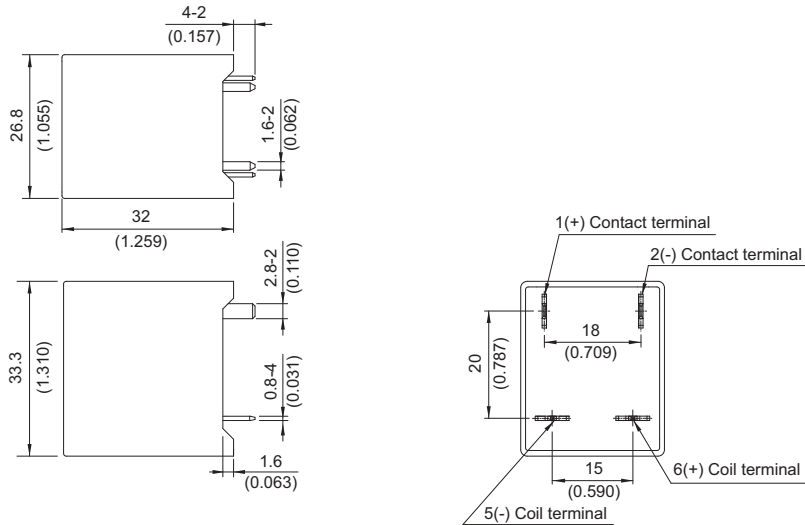

TOLERANCE:  
 LESS THAN: 1(0.039) ±0.1(0.004)  
 5(0.197) ±0.3(0.012)  
 20(0.787) ±0.5(0.020)  
 MORE THAN: 20(0.787) ±1(0.039)

»» Wiring Diagram (Bottom view)



Load sides and coil terminals are with polarities (+) and (-).

»» PC Board Layout (Bottom view)

