
FEATURES :

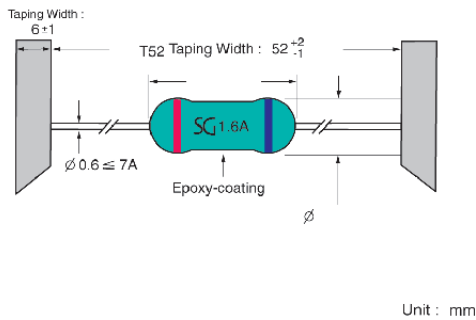
- * Fast-Acting Type (Normal Blow)
- * RoHS-Compliant Products

APPROVALS :

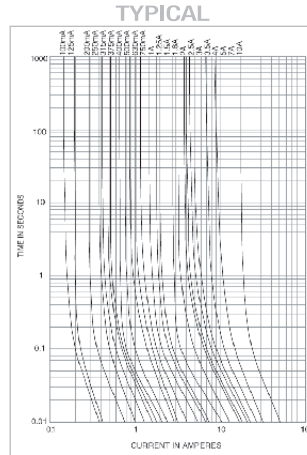
- * UL Listed [100mA-3A:125V / 375mA-3A:250V]
- * UL Recognized [3.15A-10A]
- * CSA Acceptance [100mA-10A:125V/250V]
- * METI (PSE) [1A-5A]



20N SERIES

DIMENSIONS :

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
100%	4 hours Min.
200%	60 sec Max.
300%	1 sec Max.

AVERAGE TIME CURRENT CURVES :

NOTE:

- * FS : SG 1.25A
- * FSW : 250V (500mA-5A)
- * PS : SG 1250
- * 63mA~125mA

SPECIFICATIONS :

Product Code	Ampere Rating	Voltage Rating AC	Color Coding		Resistance Value	Typical Melting It (A ² sec)
20N 0063 *	63 mA	125 V	White	Purple	6.95	TBD
20N 0080 *	80 mA	125 V	Red	Purple	10.0	TBD
20N 0100 *	100 mA	125 V	Brown	Brown	9.00	0.00144
20N 0125 *	125 mA	125 V	Silver	Silver	8.25	0.00263
20N 0200	200 mA	125 V	Red	Red	7.50	0.00578
20N 0250	250 mA	125 V	Gray	Gray	6.75	0.0100
20N 0315	315 mA	125 V	White	White	5.90	0.0169
20N 0375	375 mA	125 V	Yellow	White	0.435	0.0256
20N 0400	400 mA	125 V	Yellow	Yellow	0.405	0.0324
20N 0500	500 mA	125 / 250 V	Green		0.340	0.0440
20N 0630	630 mA	125 / 250 V	Cyan	Cyan	0.300	0.0580
20N 0750	750 mA	125 / 250 V	Purple		0.245	0.0840
20N 0800	800 mA	125 / 250 V	Purple	Purple	0.203	0.102
20N 1000	1 A	125 / 250 V	Black		0.150	0.168
20N 1250	1.25 A	125 / 250 V	Gold	Gold	0.125	0.240
20N 1500	1.5 A	125 / 250 V	Cyan		0.100	0.462
20N 1600	1.6 A	125 / 250 V	Cyan	Red	0.085	0.563
20N 2000	2 A	125 / 250 V	Red		0.068	1.005
20N 2500	2.5 A	125 / 250 V	Gray		0.050	1.690
20N 3000	3 A	125 / 250 V	Orange		0.040	2.890
20N 3150	3.15 A	125 / 250 V	White		0.028	3.423
20N 3500	3.5 A	125 / 250 V	Orange	Orange	0.020	4.410
20N 4000	4 A	125 / 250 V	Yellow		0.016	5.290
20N 5000	5 A	125 / 250 V	Gold		0.013	7.290
20N 7000	7 A	125 V	Silver		0.011	12.59
20N 8000	8 A	125 V	Silver	Black	0.009	14.39
20N 10K	10 A	125 V	Black	Black	0.007	26.01