



»» Features

- Ultra Micro 280 automotive relay.
- SPNO contact configuration.
- Switch up to 20A resistive load, 100,000 ops., 23°C.
- Operating ambient temperature -40°C to 125°C.
- Optional resistor or diode for coil transient suppression.
- Complies with RoHS-Directive 2011/65/EU and ELV-Directive 2000/53/EC.

»» Type List

| Terminal style | Contact form | Designation (provided with) | Enclosure style | |
|-----------------|--------------|-----------------------------|-----------------|----------------------|
| | | | Flux tight | Sealed type washable |
| Socket terminal | 1A (SPNO) | ----- | 303-1AH-C | 303-1AH-S |
| | | Resistor | 303-1AH-C-R1 | 303-1AH-S-R1 |
| | | Diode | 303-1AH-C-D1 | 303-1AH-S-D1 |

»» Ordering Information

303 - 1A H - C -
 1 2 3 4 5 6

- | | |
|---|---|
| 1. 303 -- Basic series designation 2. 1A -- Single pole normally open 3. H -- Contact material AgSnO 4. C -- Flux tight S -- Sealed type washable | 5. Blank -- Standard type R1 -- Coil parallel with 1/2W resistor for 12V 1.1KΩ, 24V 4.3KΩ D1 -- Coil parallel with diode 1N4007 the diode anode on # 85 terminal 6. <input type="checkbox"/> -- Coil voltage (please refer to the coil rating data for the availability) |
|---|---|

»» Contact Rating

| | |
|----------------|--|
| Resistive load | 20A 14VDC, 10A 28VDC, On 2s / Off 2s, 100K ops. |
| Motor load | Inrush 80A, steady state 16A 14VDC, On 2s / Off 5s, at -30~+80°C, 300K ops. |
| Lamp load | Inrush 80A, steady state 16A 14VDC, On 3s / Off 3s, at -30~+100°C, 100K ops. |

»» Coil Rating (DC)

| Rated voltage | Rated current ±10 % at 23°C | | Coil resistance ±10 % at 23°C | | Max. continuous voltage at 85°C ⁽¹⁾ | Pick up voltage (Max.) at 23°C | Drop out voltage (Min.) at 23°C | Power consumption at rated voltage | |
|---------------|-----------------------------|---------------|-------------------------------|---------------|--|--------------------------------|---------------------------------|------------------------------------|---------------|
| | without resistor | with resistor | without resistor | with resistor | | | | without resistor | with resistor |
| 12V | 80 mA | 91 mA | 150 Ω | 132 Ω | 133 % of rated voltage | 60 % of rated voltage | 8 % of rated voltage | approx. 0.96W | approx. 1.09W |
| 24V | 40 mA | 46 mA | 600 Ω | 527 Ω | | | | approx. 0.96W | approx. 1.09W |


Note : (1) With continuous contact current 20A.

»» Specification

| | | |
|--------------------------------------|----------------------------|---|
| Contact material | AgSnO alloy | |
| Contact voltage drop ⁽¹⁾ | Typ. 50mV at 10A | |
| Operate time ⁽¹⁾ | 10 ms Max. | |
| Release time ⁽¹⁾ | 10 ms Max. | |
| Insulation resistance ⁽¹⁾ | 20 MΩ Min. (DC 500V) | |
| Dielectric strength ⁽¹⁾ | Between open contact | : AC 500V, 50/60Hz 1 min. |
| | Between contact and coil | : AC 500V, 50/60Hz 1 min. |
| Vibration resistance | Operating extremes | 10~500Hz , 5.0G |
| | Damage limits | 10~500Hz , 5.0G |
| Shock resistance | Operating extremes | 10G |
| | Damage limits | 100G |
| Life expectancy | Mechanical | 10,000,000 ops. (frequency 18,000 ops./hr) |
| Operating ambient temperature | -40 ~ +125°C (no freezing) | |
| Weight | Approx. 20 g | |


Note : (1) Initial value. Operate and release time excluding contact bounce.

- (2) Unless otherwise specified, all tests are under room temperature and humidity.
- (3) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.
- (4) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.
- (5) Do not switch the contacts without any load as the contact resistance may become increased rapidly.
- (6) Flux tight version is recommended. If there is cleaning process and sealed type is selected, the vent-hole should be removed after the process.
- (7) Use suitable harnesses and bus bars according to the current as below :
20A type : Min. 3.0mm²
- (8) Usage, transport and storage conditions
 - 1. Temperature: -40~+125°C
 - 2. Humidity: 5 to 85% R.H.
 - 3. Pressure: 86 to 106 kPa
 - Furthermore, the humidity range varies with the temperature. So, use relays within the range indicated in the graph below.

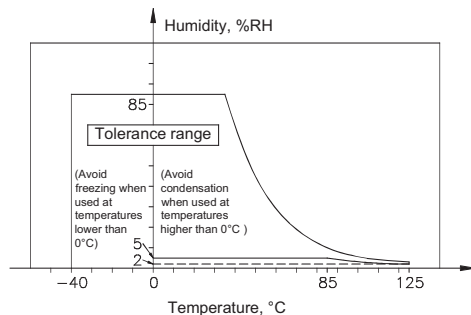

- (9) Please contact Song Chuan for the detailed information.


»» Outline Dimensions

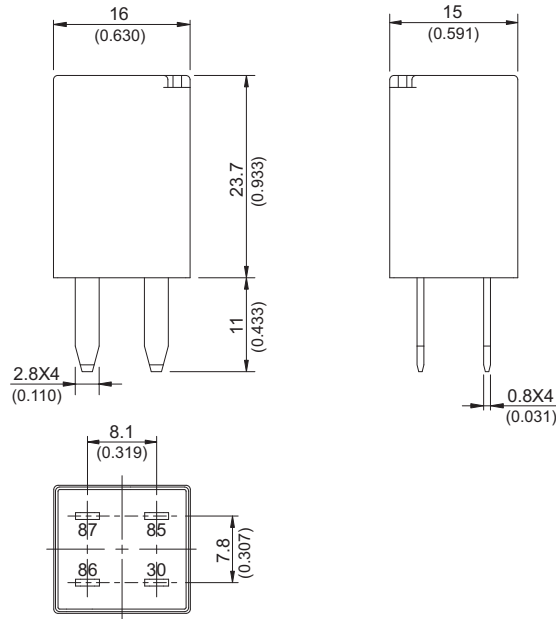

TOLERANCE:
 LESS THAN: 1(0.039) ±0.1(0.004)
 5(0.197) ±0.3(0.012)
 20(0.787) ±0.5(0.020)
 MORE THAN: 20(0.787) ±1(0.039)

»» Wiring Diagram

BOTTOM VIEW

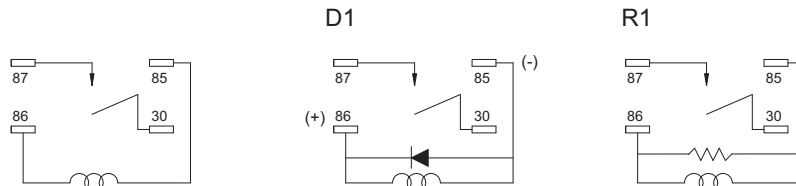

»» Engineering Data

