


GT43 Series

— Supports LVDS, Shielded Coaxial Connector —

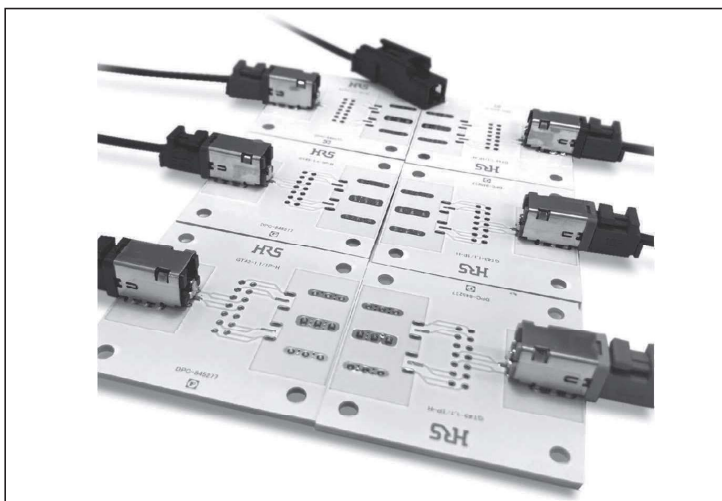


■ Features

1. Compact and space-saving design
2. Noise-resistant (conducted various noise evaluations)
3. Six key variations
4. Supports One-step crimp termination
5. High frequency characteristics: 3GHz


* For applications other than for video, consider using GT21 or GT36S.

■ Applications

Variety of applications, primarily for camera image transmission.

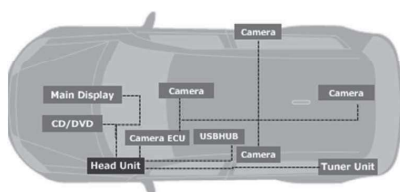

High Frequency Characteristics

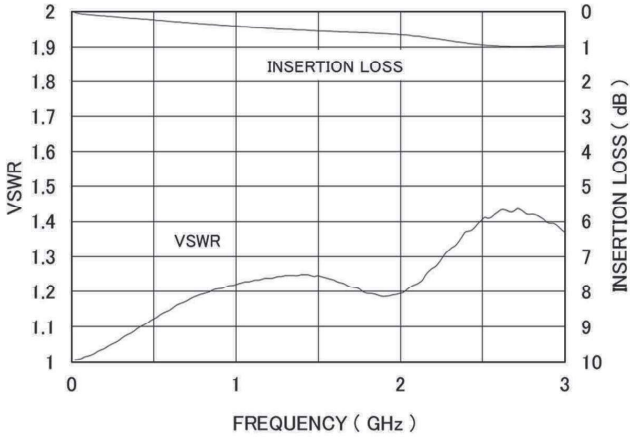

Product Specifications

Rated current	1A
Rated voltage	50V DC
Operating temperature range	-40 to 105°C (Includes the temperature rise due to current flow.)
Insulation resistance	100MΩ min (500V DC)
Withstanding voltage	500V AC for 1 min.
Contact resistance	AC 50mΩ Max.
Mating/un-mating cycles	30 cycles



Material and finish

	Receptacle		Plug		Jack	
	Material	Finish	Material	Finish	Material	Finish
Housing	PA	Black*	PBT	Black*	PBT	Black In-line type in black only
Center contact	Brass	Tin plating	Copper alloy	Tin plating	Copper alloy	Tin plating
External terminal	Brass	Tin plating	Copper alloy	Tin plating	Copper alloy	Tin plating
Insulator	PA	Black	PA	Black	PA	Black
Shield case	Copper alloy	Tin plating	-	-	-	-
Retainer	-	-	PBT	Dark gray	PBT	Dark gray

* Available in six color variations: black, brown, green, blue, gray, and purple. Standard color is black.


Jul. 1., 2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

■ Coaxial Cable Terminal for F Connector

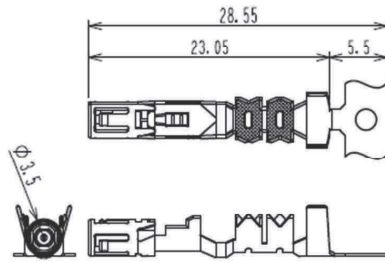

Part No.	HRS No.	Material and finish or color	Conductor size	Insulator outer diameter	Jacket outer diameter	Sales unit	RoHS
GT43-2428/1.6-2.9SCF	753-1003-0	Insulator: PPS/Black Center terminal: Phosphor bronze/Tin plating Outer terminal: Phosphor bronze/Tin plating	24-28 AWG	∅1.5 -2.0	∅2.6 -3.1	2,500 pcs/reel	○


■ Coaxial Cable Terminal for M Connector

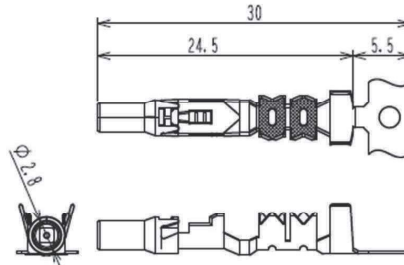

Part No.	HRS No.	Material and finish or color	Conductor size	Insulator outer diameter	Jacket outer diameter	Sales unit	RoHS
GT43-2428/1.6-2.9PCF	753-1004-0	Insulator: PPS/Black Center terminal: Brass/Tin plating Outer terminal: Phosphor bronze/Tin plating	24-28 AWG	∅1.5 -2.0	∅2.6 -3.1	2,500 pcs/reel	○

* For crimping tools, please contact your Hirose Electric account representative.


■ Housing for F Connector (1 Coaxial)

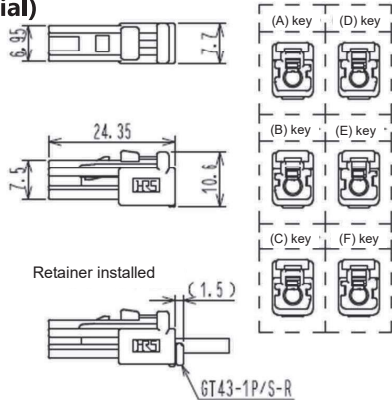

Part No.	HRS No.	Material	Color	Key Position	Sales Unit	RoHS
GT43-1S-HU(A)	753-1002-0	PBT	Brown	(A)	1000	○
GT43-1S-HU(B)	753-1008-0		Green	(B)		
GT43-1S-HU(C)	753-1009-0		Blue	(C)		
GT43-1S-HU(D)	753-1010-0		Black	(D): Standard		
GT43-1S-HU(E)	753-1011-0		Dark gray	(E)		
GT43-1S-HU(F)	753-1012-0		Violet	(F)		

* Applicable terminal: Coaxial terminal for GT43 Series F connector
 * Use together with retainer (GT431-1P/S-R) sold separately.

■ Housing for M Connector (1 Coaxial)

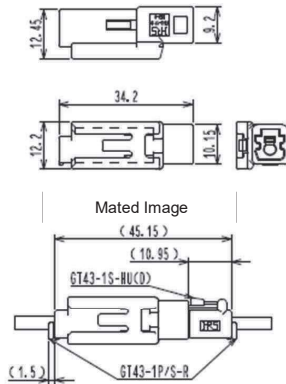


Part No.	HRS No.	Material	Color	Key Position	Sales Unit	RoHS
GT43-1PP-HU(D)	753-1006-0	PBT	Black	(D): Standard	500	○

* Applicable terminal: Coaxial terminal for GT43 Series M connector
 * Use together with retainer (GT431-1P/S-R) sold separately.
 * Please ask for a reference drawing for recommended mounting bracket dimensions.


Jul. 1, 2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved. GT5 GT13 GT16 GT19 GT21 GT24 GT27 GT30 GT33 GT36 GT39 GT42 GT45 GT48 GT51 GT54 GT57 GT60 GT63 GT66 GT69 GT72 GT75 GT78 GT81 GT84 GT87 GT90 GT93 GT96 GT99 FH01 FH04 FH07 FH10 FH13 FH16 FH19 FH22 FH25 FH28 FH31 FH34 FH37 FH40 FH43 FH46 FH49 FH52 FH55 FH58 FH61 FH64 FH67 FH69 FH72 FH75 FH78 FH81 FH84 FH87 FH90 FH93 FH96 FH99

■ Common Retainer for F and M Connectors (1 Coaxial)

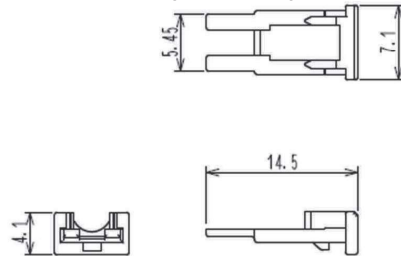

Part No.	HRS No.	Material	Color	Sales unit	RoHS
GT43-1P/S-R	753-1007-0	PBT	Dark Gray	2000	○



■ Common Shield Plate for F and M Connectors



Part No.	HRS No.	Material and finish or color	Sales unit	RoHS
GT43-1P/S-CSB	753-1005-0	Insulator: LCP/Black Terminal: Brass/Tin plating	2 reels (2,450 pcs/reel)	○

* Applicable terminal: Coaxial terminal for GT43 Series F and M connectors

■ Board Connector (1 Coaxial, Lead Reflow type)

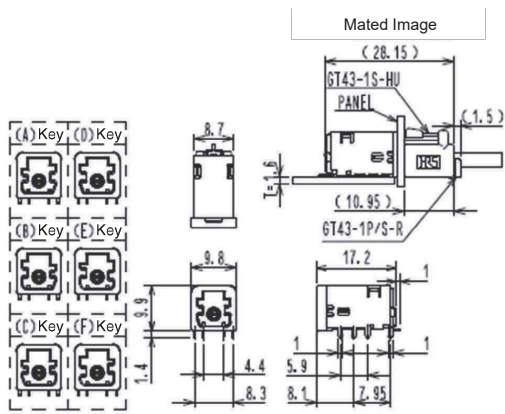


* Please ask for a reference drawing for recommended board mounting patterns.

Part No.	HRS No.	Material and finish or color	Color	Key position	Sales unit	RoHS
GT43-1P-H(A)	753-1001-0	Housing: PA Insulator: PA/Black Center terminal: Brass/Tin plating Outer terminal: Brass/Tin plating Shield case: Copper alloy/Tin plating	Brown	(A)	1	○
GT43-1P-H(B)	753-1013-0		Green	(B)		
GT43-1P-H(C)	753-1014-0		Blue	(C)		
GT43-1P-H(D)	753-1015-0		Black	(D): Standard		
GT43-1P-H(E)	753-1016-0		Dark Gray	(E)		
GT43-1P-H(F)	753-1017-0		Violet	(F)		

GT5
 GT13
 GT16
 GT19
 GT21
 GT22
 GT23
 GT24
 GT25
 GT26
 GT27
 GT28
 GT29
 GT30
 GT31
 GT32
 GT33
 GT34
 GT35
 GT36
 GT37
 GT38
 GT39
 GT40
 GT41
 GT42
 GT43
 GT44
 GT45
 GT46
 GT47
 GT48
 GT49
 GT50
 GT51
 GT52
 GT53
 GT54
 GT55
 GT56
 GT57
 GT58
 GT59
 GT60
 GT61
 GT62
 GT63
 GT64
 GT65
 GT66
 GT67
 GT68
 GT69
 GT70
 GT71
 GT72
 GT73
 GT74
 GT75
 GT76
 GT77
 GT78
 GT79
 GT80
 GT81
 GT82
 GT83
 GT84
 GT85
 GT86
 GT87
 GT88
 GT89
 GT90
 GT91
 GT92
 GT93
 GT94
 GT95
 GT96
 GT97
 GT98
 GT99
 GT100

■ Board Connector (1 Coaxial, Lead Reflow / GND Connection type)

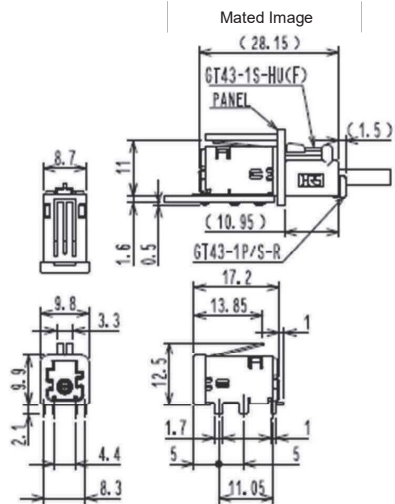

* Please ask for a reference drawing for recommended board mounting patterns.

Part No.	HRS No.	Material and finish or color	Color	Key position	Sales unit	RoHS
GT43D-1P-H(F)	753-1018-0	Housing: PA Insulator: PA/Black Center terminal: Brass/Tin plating Outer terminal: Brass/Tin plating Shield case: Copper alloy/Tin plating	Violet	(F)	1	○

Please refer to our cable termination procedure manual for performing terminations.