


# **Surface Mount Trench Schottky Rectifier Diode in TO-277**

#### ■ Features

- Low forward voltage drop.
- Excellent high temperature stability.
- Fast switching capability.
- Halogen-free part
- Lead-free parts meet environmental standards of MIL-STD-19500 /228



- Epoxy: UL94-V0 rated flame retardant.
- Case: Molded plastic, TO-277B.
- Lead: Solder plated, solderable per MIL-STD-750, Method 2026.
- Mounting Position : Any.
- Weight: Approximated 0.093 grams.





### **Absolute Maximum Ratings**

Ratings at 25 °C, ambient temperature unless otherwise specified


Parameter	Conditions	Symbol	CP10S45SG	UNIT	
Peak repetitive reverse voltage		V <sub>RRM</sub>			
Working peak reverse voltage		V <sub>RWM</sub>	45	V	
DC blocking voltage		V <sub>RM</sub>			
Forward rectified current		Io	10	А	
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I <sub>FSM</sub>	120	А	
Thermal resistance	Junction to case	R <sub>eJC</sub>	10	°C/W	
	Junction to ambient	R <sub>eJA</sub>	35		
Storage temperature		T <sub>STG</sub>	-55 ~ +150	0.0	
Operating temperature		TJ	-55 ~ +150	°C	


Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	$I_R = 0.5 \text{mA}, T_J = 25^{\circ} \text{C}$	$V_{(BR)R}$	45			V
	$I_F = 5A, T_J = 25^{\circ}C$				420	
Forward voltage drop	$I_{F} = 10A, T_{J} = 25^{\circ}C$ $V_{F}$			460	470	mV
	$I_F = 10A, T_J = 125^{\circ}C$			410		
Davis and a summer to	$V_R = V_{RRM} T_J = 25^{\circ}C$	1		0.06	0.3	mA
Reverse current	$V_R = V_{RRM} T_J = 125^{\circ}C$	I <sub>R</sub>		40	80	


Rev. 1.0, 23-May-2012 www.crea-tek.com





# **Typical Characteristics** (T<sub>amb</sub> = 25 °C unless otherwise specified)

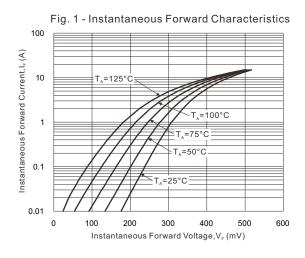

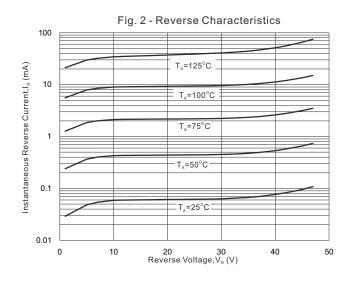

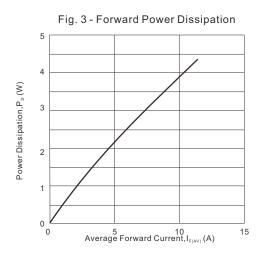

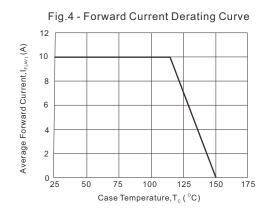


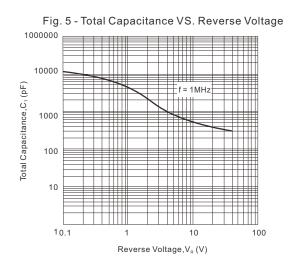

Rev. 1.0, 23-May-2012 www.crea-tek.com



# **Package Dimensions**

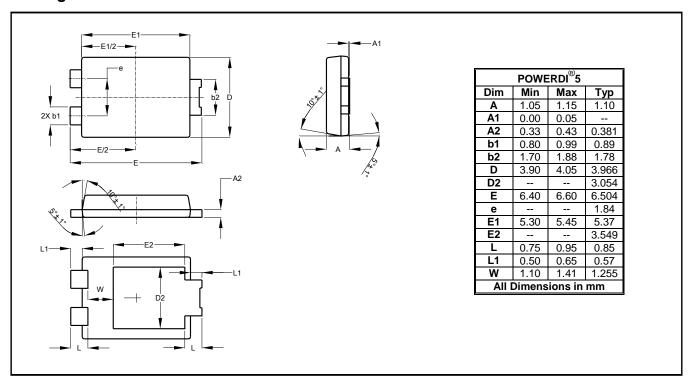

## **Ordering inormation**

Order code	Package	Marking	Packaging option	Base quantity	Packaging specification
CP10S45SG	TO-277		Tape and reel	5000pcs / reel	EIA STD RS-481

## **Reision history**

Date	Revision	Changes
23-May-2012	1.0	Initial release

Rev. 1.0, 23-May-2012 www.crea-tek.com



#### **CAUTION / WARNING**

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2009,CREATEK Microelectronics

© REATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved