


HSF


NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

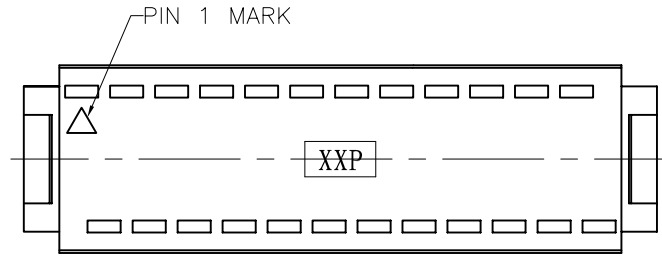

TYPE 2

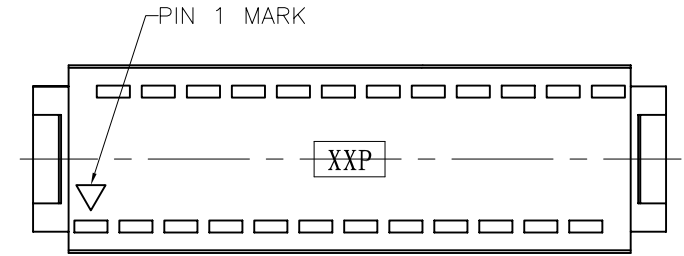



TYPE 1

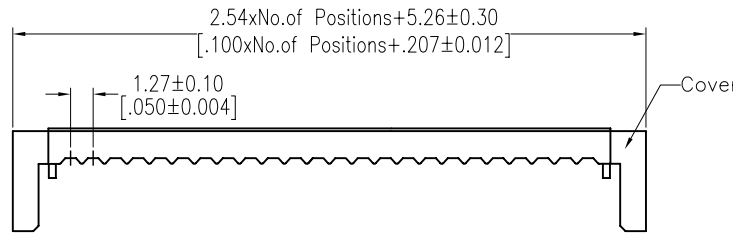

Ordering Information

5350- XX B XX B 0 X

No. of Pins	Contact Plating	Color Insulator	Series No.
△ 08 24	S0=Gold Flash/Ni	B=Black	1=TYPE 1
10 26	S3=10u"Gold/Ni	G=Grey(427C)	2=TYPE 2
14 28	S4=15u"Gold/Ni	E=Grey(413C)	
16 34	S5=30u"Gold/Ni		
18 40	SN=Tin		
20	SM=Matte Tin		

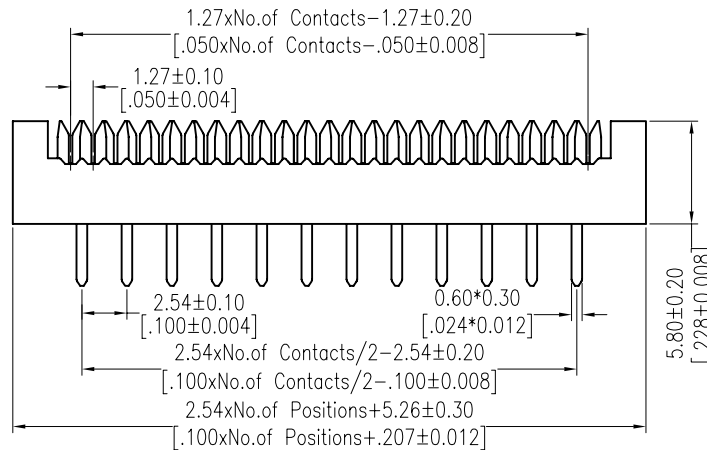

TYPE	PART NO.
TYPE 1	5350-XXBXXB01
TYPE 2	5350-XXBXXB02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2013/01/31	UNIT	mm	SEE TAB
A1	2013/01/31	Modify The No. of Pins	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54x7.62 DIP PLUG CONNECTOR (TERMINATED HEIGHT 5.8)
AO	2012/10/09	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					