



# HSF

**NOTES:**

Rated Current:1.0AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-55°C to +85°C

Contact Material:Phosphor Bronze  
 Contact Plating:Sn Over Ni  
 Insulator Material:Thermoplastic UL94V-0

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

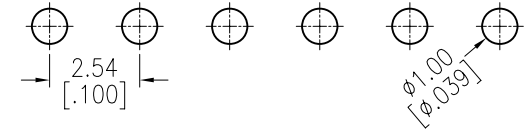
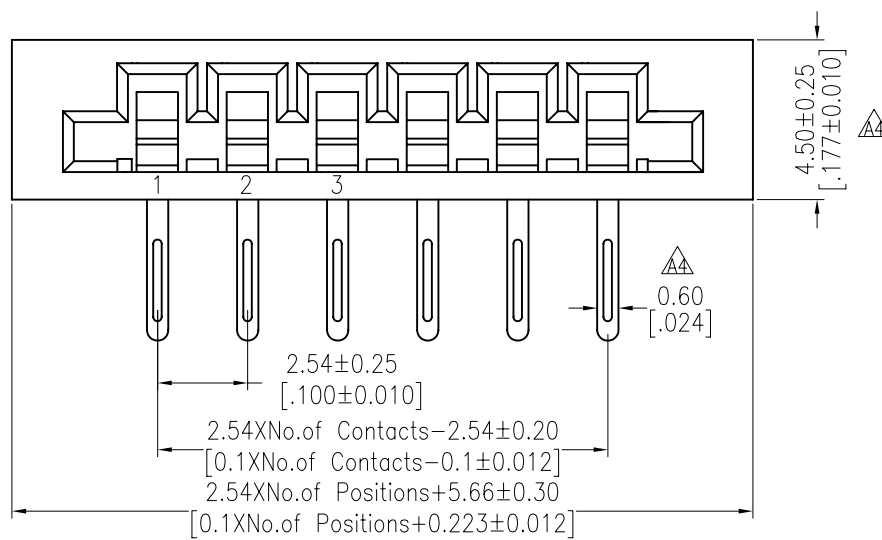


## Ordering Information

5110-XX R R D N X T 01

No. of Pins  
03-27P

Color  
 A=Brown  
 B=Black  
 W=White  
 E=Beige

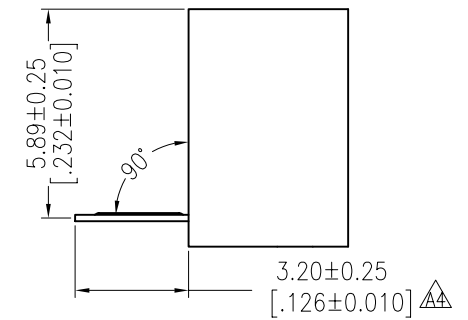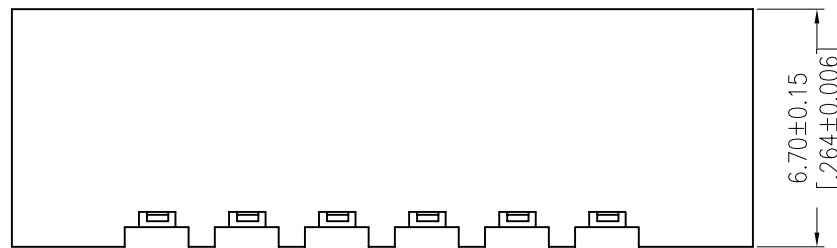

A4	11/11/17	3.00 → 3.20 4.55 → 4.50 0.65 → 0.60			OPERATION	DRAW	MYQ	11.11.17	SCALE	FIT	PART NO. TITLE:
A3	11/02/22	图面与产品不符, 塑胶上是没缺口, 而图面上就有缺口			X.X	±0.40	DESIGN		UNIT	mm	
A2	10/12/02	5110-XXRDDNX01 → 5110-XXRRDXT01			X.XX	±0.25	CHECK		SIZE	A4	
A1	09/08/11	3.20 → 3.00			X.XXX	±0.15	APPROVE		SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	☉	
					DIM	TOL					